
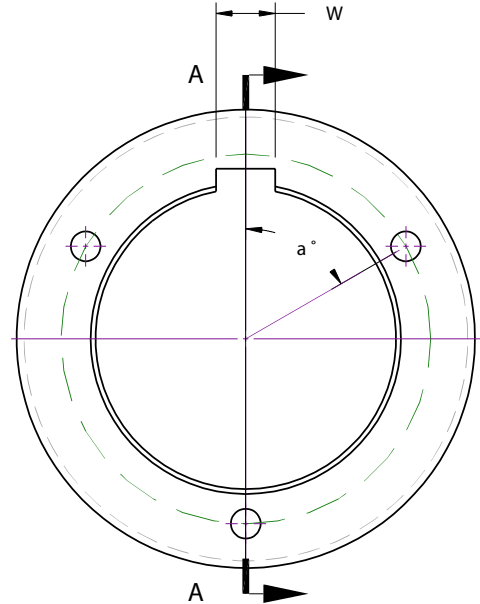


# Hubs

## SPLIT TAPER STYLE

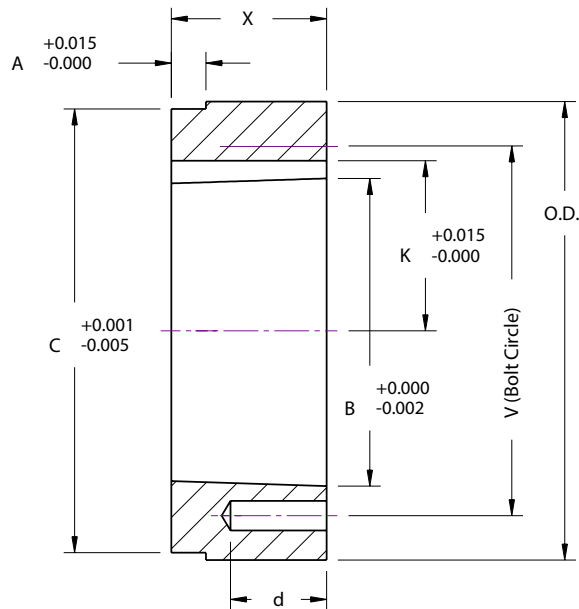

Part Number	For Bushing	Dimensions (in)									Tapped Holes			Weight (lbs)
		O.D.	A	B	C	K	V	W	X	a	d	No.	Size	
HG1	G	2	0.174	1.168	1.875	—	1 9/16	—	5/8	—	5/8	2	1/4-20	0.4
HH1	H	2 1/2	0.174	1.621	2.375	—	2	—	7/8	—	5/8	2	1/4-20	0.6
HCH1	H	2 1/2	0.625	1.621	2.375	—	2	—	7/8	—	5/8	2	1/4-20	0.7
HP1	P1	3	0.292	1.9375	2.875	1 3/32	2 7/16	3/8	1 5/16	60°	5/8	3	5/16-18	1.4
HCP1	P1	3	1.000	1.9375	2.875	1 3/32	2 7/16	3/8	1 5/16	60°	5/8	3	5/16-18	1.1
HP2	P2	3	1.100	1.9375	2.875	1 3/32	2 7/16	3/8	2 5/16	60°	5/8	3	5/16-18	2.5
HB1	B	3 7/8	0.292	2.623	3.75	1 7/16	3 1/8	1/2	1 5/16	60°	13/16	3	5/16-18	2.3
HB2	B	4 1/2	0.709	2.623	4.375	1 7/16	3 1/8	1/2	1 3/4	60°	13/16	3	5/16-18	4.7
HQ1	Q1	4 1/2	0.709	2.875	4.375	1 9/16	3 3/8	1/2	1 3/4	60°	7/8	3	3/8-16	4.4
HCQ1	Q1	4 1/2	1.250	2.875	4.375	1 9/16	3 3/8	1/2	1 3/4	60°	7/8	3	3/8-16	4.4
HQ2	Q2	4 1/2	1.606	2.875	4.375	1 9/16	3 3/8	1/2	2 3/4	60°	7/8	3	3/8-16	6.9
HR1	R1	5 3/4	0.709	4.000	5.625	2 3/16	4 5/8	3/4	2	60°	1 1/8	3	3/8-16	7.3
HR2	R2	5 3/4	1.606	4.000	5.625	2 3/16	4 5/8	3/4	4	60°	1 1/8	3	3/8-16	15.4
HS1	S1	6 3/4	0.946	4.625	6.5	2 9/16	5 3/8	3/4	3 5/16	60°	1 5/8	3	1/2-13	17.3
HS2	S2	6 3/4	2.963	4.625	6.5	2 9/16	5 3/8	3/4	5 11/16	60°	1 5/8	3	1/2-13	30.4
HU0	U0	8 1/2	2.000	6.000	8.25	3 1/4	7	1 1/4	3 3/4	60°	2	3	5/8-11	32.0
HU1	U1	8 1/2	2.963	6.000	8.25	3 1/4	7	1 1/4	5 5/8	60°	1 3/4	3	5/8-11	44.6
HU2	U2	8 1/2	6.016	6.000	8.25	3 1/4	7	1 1/4	8 5/8	60°	1 3/4	3	5/8-11	69.0
HW1	W1	12 1/2	2.963	8.500	12.25	4 9/16	10	1 1/4	6 3/8	22 1/2	1 3/4	4	3/4-10	130